


# GUIDE TO DOMESTIC BATHROOM REGULATIONS

PLEASE NOTE: THIS IS A GUIDE TO DOMESTIC SITUATIONS. FOR NON-DOMESTIC SITUATIONS OR IF YOU ARE IN DOUBT. WE RECOMMEND THAT YOU CONSULT A QUALIFIED ELECTRICIAN.  
(IEE WITING REGULATIONS 16th EDITION [Amd. 3] EFFECTIVE 1.12002)

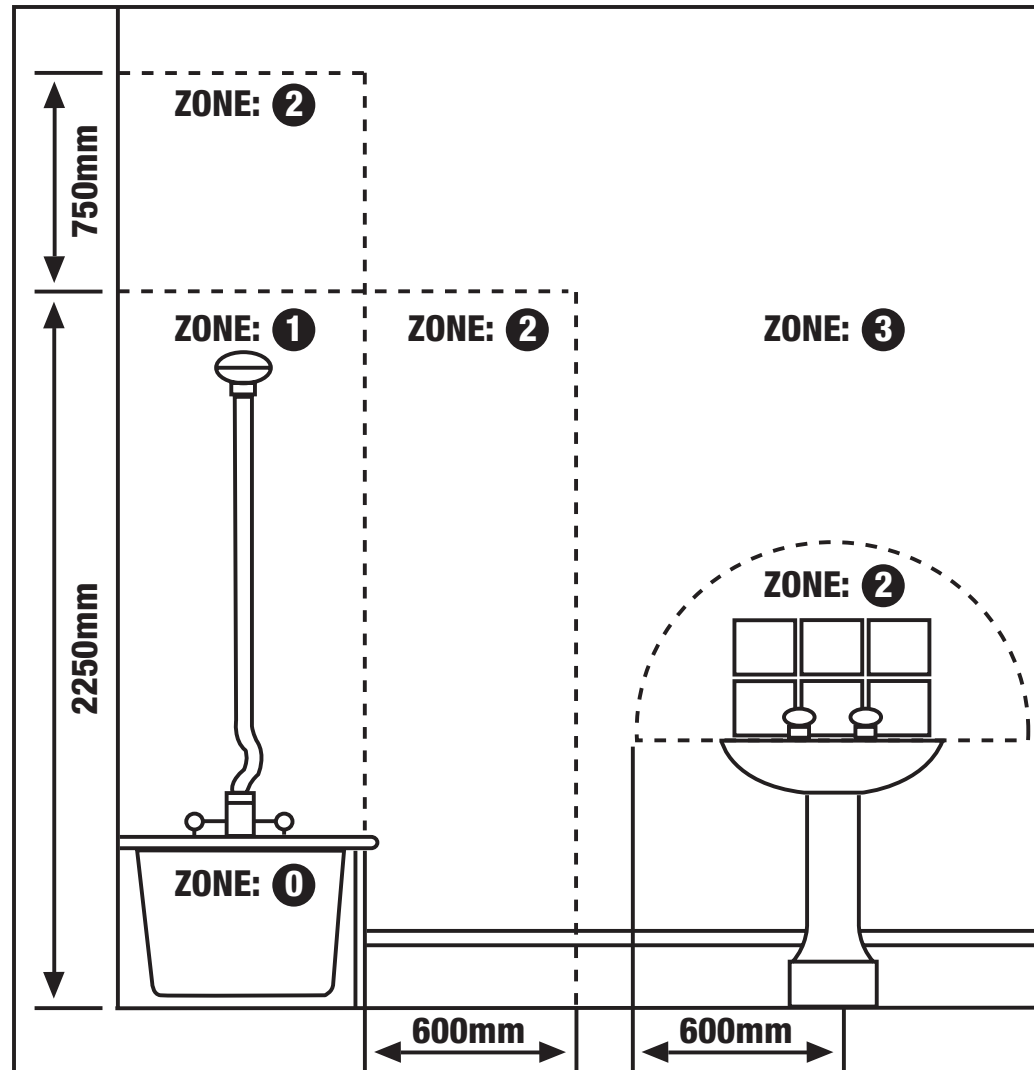

## ZONE KEY

- 0** ALL LIGHT FITTINGS IN ZONE 0 MUST BE WATERTIGHT AND BE 12 VOLTS OR LESS. (IP67 OR IPX7).
- 1** ALL LIGHT FITTINGS IN ZONE 1 MUST BE SPLASH PROOF (IP44 OR IPX4). PLEASE NOTE: MAINS VOLTAGE FITTINGS IN THIS ZONE MUST BE WIRED ON A SEPERATE CIRCUIT & PROTECTED BY A 30mA RESIDUAL CURRENT DEVICE (RCD).
- 2** ALL LIGHT FITTINGS IN ZONE 2 MUST BE SPLASHPROOF (IP44 OR IPX4).
- 3** ALL LIGHT FITTING IN ZONE 3 HAVE NO SPECIAL REQUIREMNTS.